


# Safety Anchor KN-AO

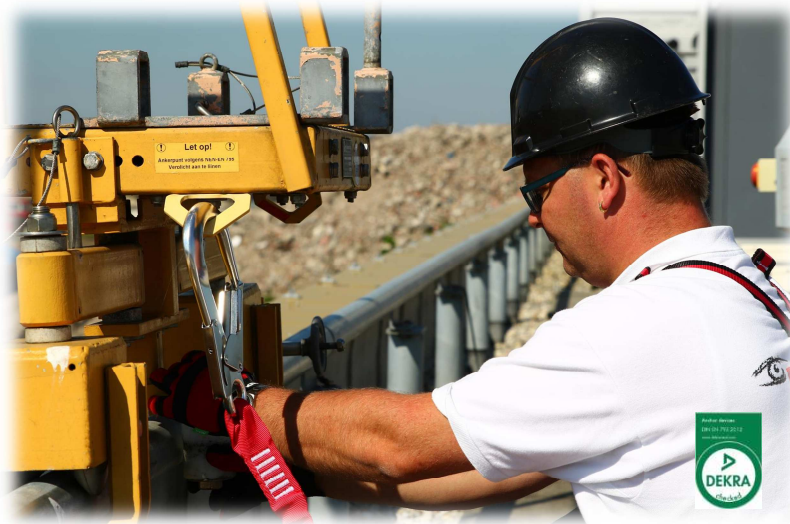


## Product information

- Suitable for metal and concrete structures
- Installation with one bolt / mechanical anchor
- Maximum two persons
- Certified by DEKRA Exam GmbH
- EN-795:2012 type A & TS 16415:2013
- ANSI Z359 tested 22kN




## Technical information

- Concrete minimal drilling depth 135 mm
- Drilling hole mechanical anchor 20 mm
- Fixation by one (1) M12 bolt or anchor
- Easy and reliable Safety Anchor
- Stainless steel – Coated Yellow RAL 1003
- Size 115 x 100 x 5 mm

## Drawings & impressions

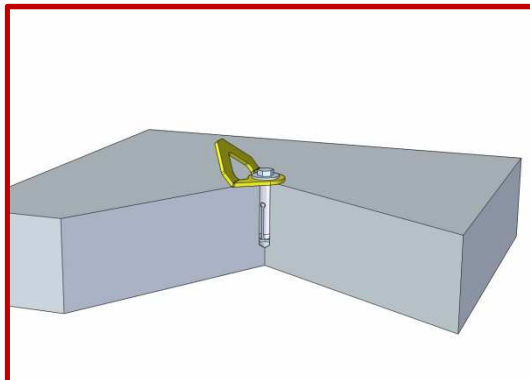

## Marking & information



### Calculating your fall arrest and safe working height

Calculations using a fall arrest lanyard fixed at foot level

	2m Lanyard	1,5m Lanyard
Lanyard Length	2m	1.5m
Energy Absorber	1.75m	1.75m
Body Height	2m	2m
Safety Distance	1m	1m
<b>Minimum Clearance</b>	<b>6.75m</b>	<b>6.25m</b>

