

# Double Dee Rings

## Installation and Usage Instructions

### IMPORTANT NOTES:

- Prior to each use of the tool, inspect the double dee ring for cracks or excessive wear and discard if found.
- Assure the pin is fully engaged and still functioning properly by trying to remove the pin by applying slight pressure while trying to remove the pin. If the pin exhibits resistance, the c-clip is still installed.
- Fully tighten the pin prior to each use.
- Use only on tools with enlarged ends.

### WEIGHT RATINGS

PART NO.	MAX TOOL WEIGHT	MAX TETHER LENGTH
DBLD0406	10 lbs (4.54kg)	60" (152.4cm)
DBLD075100	15 lbs (6.80kg)	60" (152.4cm)
DBLD085115	15 lbs (6.80kg)	60" (152.4cm)
DBLD150265	25 lbs (11.34kg)	60" (152.4cm)

### WARNINGS

ALWAYS WEAR APPROPRIATE PROTECTIVE EQUIPMENT. DO NOT USE THIS PRODUCT ON OR NEAR ROTATING EQUIPMENT. IMPROPER USE COULD RESULT IN DEATH OR DISMEMBERMENT. IF ANY CRACKS, RIPS OR TEARS NOTED, PRODUCT REPLACEMENT IS REQUIRED.



**1** The Double Dee rings are for the use on tools with enlarged ends only. Verify the C-Clip is installed on the pin prior to installing. It will fit loosely around the pin groove.




**2** With Double Dee ring apart insert the tool into the oval ring.



**3** Insert the pin and engage the threads with a screw driver but do not tighten.



**4** Assure that the tool will not pass the pin by sliding/twisting it until it stops, then slide/twist it the opposite direction and again assuring it stops. For the best functionality and use, choose the side of the Double Dee that provides the most freedom but still contained.

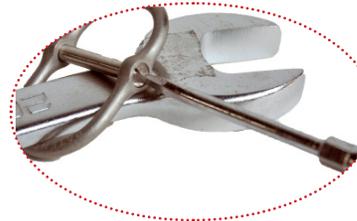

**5** Once it is threaded properly, tighten the pin by using a straight or flat end screw driver. While installing the pin, resistance will be felt as the c-clip starts to enter the hidden groove in the bore.



**6** To assure the pin is engaged properly, try to back out the pin using very light pressure- if there is resistance felt the pin is engaged properly, if not remove the pin and install a new one.

# INSTALLATION



Ty-Flot, Inc. • 305 Massabesic Street • Manchester, NH 03103  
www.ty-flot.com • Phone: 603-669-5169 • Fax: 603-669-5113

**THE DROP STOPS HERE**